


# Fransgård W- 8016-EH Winch



- Forstline winch are unique in all details.
- The winch was developed and constructed in a close relation with the user.
- W-8016-EH can be equipped with hydraulic device for unwinding wire rope.
- A special developed "noiseless" chain pulling system ensures a good working environment.
- Optimum distance between top pulley and wire roll ensures a perfect spooling of the wire cable.
- Several compartments for storing equipment and the possibility of mounting a trailer coupling.
- Optimum security for the operator is ensured with several screens offering protection from moving parts.



# Fransgård

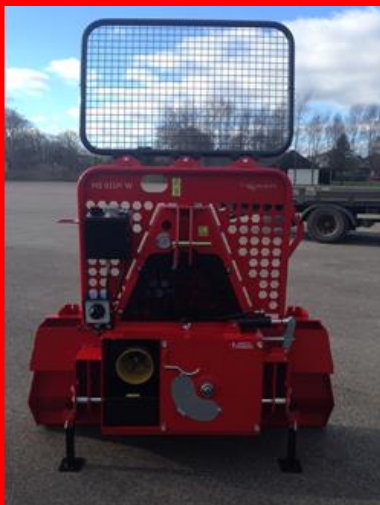

Several protection screens and a “noiseless” chain tightener ensures a safe and good working environment for the user.



The unique design of the winch includes the smallest detail. The sturdy frame construction is made from special steel. A solid, wide blade/butt plate and lower pulley are standard. Chainsaw holder and trailer attachment are optional.

Technical data:	W-8016-EH
Pulling power	8 tons
Tractor power	60 kW
-3point linkage	Kat. I - II
Weight	538 kg
Wire standard ø x m	11 mm x 60 m
Wire max. ø x m	11 mm x 120 m
Pulling speed v/400 rpm	0,5 – 2,0 m/s
PTO attachment height	64 cm
Height top pulley	160 cm
Total height	240 cm
Dozerblade	80 x 180 cm
Protective screen	Standard



The PTO driven self-contained hydraulic system assures optimal performance



W-8016-EH with optional hydraulic device for unwinding wire rope, relieves the heavy work of pulling the wire out.



Two integrated storage compartments for accessories, is standard.

Importer / distributor:

**SCANTRAX S.A.**

Place Léopold Roger  
B-5660 MARIEMBOURG  
Tél.: +32.60.31.25.01 - 31.21.94  
Fax: +32.60.31.25.85  
E-mail: info@scantrax.be  
[www.scantrax.be](http://www.scantrax.be)



Producer:

**Fransgård**

Fransgård Maskinfabrik A/S  
Fredbjergvej 132 DK-9640 Farsø  
[www.fransgard.dk](http://www.fransgard.dk)